

Chemical Feeders

»»» Automatic Chlorinators and Brominators

EASY, ECONOMICAL SANITIZATION FOR ANY POOL




HAYWARD® AUTOMATIC CHEMICAL FEFDER FEATURES

- » Available for chlorine <u>or</u> bromine sanitization using large or small slow-dissolving tablets
- » 9- and 4.2-lb chemical capacities fit in-ground and above-ground pools and spas of all sizes
- » Multiple in-line and off-line configurations allow for simple installation in new construction, aftermarket and replacement applications
- » Large dial control valve allows for easy feed rate adjustment
- » EasyLok™ threaded cover provides safe and convenient access to tablets
- » Chemical-resistant Viton® seal and corrosionresistant components provide heavy-duty durability

MODEL NUMBER	PIPE SIZE	CHEMICAL CAPACITY	FEEDER WIDTH	FEEDER HEIGHT
IN-LINE CHLORINA	TORS	-		
CL100	11/2" FIP	4.2 lbs.	81/4"	151/4"
CL200*	11/2" FIP	9 lbs.	9"	143/4"
CL2002S**	2" SKT	9 lbs.	9"	143/4"
OFF-LINE CHLORIN	ATORS			
CL110	_	4.2 lbs.	6³/4"	13"
CL220	_	9 lbs.	81/4"	151/2"
OFF-LINE CHLORIN	ATORS FOR A	BOVE-GROUND	P00LS***	
CL110ABG	_	4.2 lbs.	6³/4"	13"
CL220ABG	_	9 lbs.	81/4"	151/2"
OFF-LINE BROMINA	ATORS			
CL220BR	_	9 lbs.	81/4"	151/2"
ACCESSORIES				
SP1500UNMPAK1	Flush union connector with 1½" male nipple. For mounting in-line chlorine feeders.			
SP1500UNPAK2	Set of two flush union connectors. Fits CL100 and CL200 chlorinators inlet and outlet.			

IN-LINE AND OFF-LINE CONFIGURATIONS


To accommodate most capacity, plumbing and space considerations

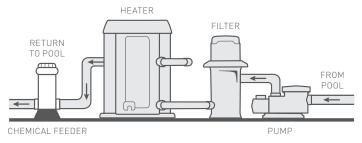



IN-LINE INSTALLATIONFOR CL100, CL200 AND CL2002S IN-LINE FEEDERS

Use 1-1/2" FIP ports to connect to filter system plumbing

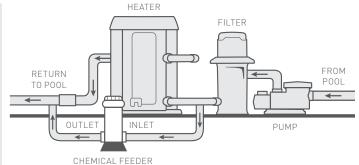



OFF-LINE INSTALLATION FOR CL110 AND CL220 OFF-LINE FEEDERS

Install next to filtration equipment and operate on system pressure differential

» hayward.com » 1-888-HAYWARD

Pumps » Filters » Heating » Cleaners » Sanitization » Automation » Lighting » Water Features » White Goods



^{*}Includes mounting base.

^{**}Features 2" inlet and outlet ports for applications with 50 GPM to 90 GPM flow rates.

^{***} Packaged with a universal adapter kit for all Hayward above-ground filter systems - Perflex, § sand or cartridge.