

HeatPro®VS Series

Variable-Speed Heat & Cool Heat Pumps

ULTRA-QUIET, EFFICIENT HEATING & COOLING



EXPERT LINE®






SOUNDS BETTER.

Powered by the same variable-speed technology as our industry-leading pumps, it's no surprise that the HeatPro® VS Series heat & cool heat pump sets the standard for quiet performance. Available in 95K and 120K BTU models, HeatPro VS is built to run more quietly and efficiently than anything else on the market, so pool owners can find a new level of relaxation each time they turn it on.

Hear that? That's the sound of superior comfort.



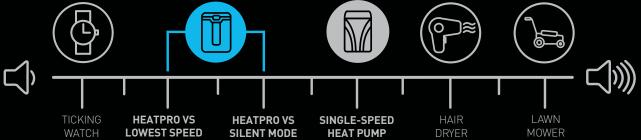

EFFICIENT HEATING & COOLING.

HeatPro VS uses ambient air to precisely heat and cool the water with the **set-and-forget** convenience of automatic output modulation.



HEATING CAPABILITY

with temp-specific speeds and reduced time to heat



COOLING CAPABILITY

with active defrost for low ambient operation



HEATPRO VS

SAVES EQUIVALENT OF SINGLE-SPEED HEATER IN 3 SWIM SEASONS†



COEFFICIENT OF PERFORMANCE

Coefficient of Performance (COP) is the industry-standard metric for heater efficiency. It measures the energy output produced for each unit of input (e.g., 13 COP = 13 heat units output per 1 electricity input).

ADD OMNI® AUTOMATION FOR A NEW DEGREE OF CONTROL.

The industry-best HeatPro VS gets even better when you pair it with top-rated Omni automation—offering advanced management of temperature, runtime and a whole lot more.

- » Remote heating and cooling control lets users set temperature from virtually anywhere
- » Intuitive scheduling with automatic temperature adjustment from custom inputs
- » Status updates sent directly from HeatPro VS to OmniLogic® mobile app



FEATURES MADE FOR THE TRADE.



VERTICAL DISCHARGE FAN

Provides greater placement flexibility in any in-ground pool pad



TITANIUM HEAT EXCHANGER

Durable design resists corrosion caused by imperfect water chemistry



INTUITIVE CONTROL PANEL

3.5" touchscreen offers simple, at-a-glance management



AHRI CERTIFICATION

The first variable-speed heat & cool heat pump certified for performance and value

| MODEL NUMBER | HP51202T NEW! | HP50952T |
|------------------------------------|-------------------------------|-------------------------------|
| BTU Heating Capacity | · | |
| 80/80/80* | 120,000 | 97,000 |
| 80 / 80 / 63 * | 112,000 | 92,000 |
| 50 / 80 / 63 * | 65,000 | 60,000 |
| BTU Cooling Capacity | | |
| 95 / 90 / 80 * | 48,000 | 42,000 |
| Coefficient of Performance, Heatin | g | |
| 80 / 80 / 80 * | 5.8 | 5.3 |
| 80 / 80 / 63 * | 5.5 | 5.1 |
| 50/80/63* | 4.0 | 4.0 |
| Compressor & Fan Speed | Variable | Variable |
| Minimum Operating Temperature | 40°F | 40°F |
| Power Supply | 208-230V / 60 Hz / 1 Ph | 208-230V / 60 Hz / 1 Ph |
| kW Input (80 / 80 / 80) | 6.1 | 5.4 |
| Minimum Circuit Amps | 45 | 43 |
| Maximum Fuse Breaker Size | 60 | 60 |
| Water Flow Rate (Min/Max) | 28 / 75 GPM | 25 / 75 GPM |
| Water Connection | 2" Socket x 2.5" Spigot Union | 2" Socket x 2.5" Spigot Union |
| Refrigerant | R410A | R410A |
| Unit Dimensions | 36.2" D x 33.8" W x 44.2" H | 36.2" D x 33.8" W x 44.2" H |
| Unit Weight | 286 LBS | 251 LBS |
| Unit Shipping Dimensions | 42.3" D x 39.2" W x 48.0" H | 42.3" D x 39.2" W x 48.0" H |
| Unit Shipping Weight | 381 LBS | 346 LBS |

*Ambient Air Temperature / Water temperature / Relative Humidity

» hayward.com » 1-888-HAYWARD

CERTIFIED TO WWW.ahridirectory.org

Pumps » Filters » Heaters » Sanitization » Automation » Lighting » Water Features » Cleaners » Safety

